Greenply

DECOR KI HAR ZARURAT KA REPLY

ABOUT US

Greenply Industries Limited, founded in 1984 in Mon district, is a pioneering force in discovering new prospects, fostering product innovation, and embracing sustainable methodologies. As a premier interior infrastructure company in India, Greenply Industries has left an indelible mark on interior spaces nationwide for over 30 years. With a diverse portfolio spanning plywood, MDF, particle boards, PVC, furniture fittings and laminated wooden flooring, block boards, decorative veneers, flush doors, and an extensive range of complementary offerings, Greenply Industries remains at the forefront of shaping the Indian interior landscape.

WATCH GREENPLY JOURNEY ON HISTORY TV 18

SCAN TO WATCH THE VIDEO

MANUFACTURING AND DISTRIBUTION EXCELLENCE

Embracing innovation and leveraging cutting-edge technology, Greenply creates products that cater to the ever-evolving needs of consumers. With an unwavering commitment, Greenply sets new industry standards, reflecting its passion for delivering exceptional solutions that shape the future.

Greenply

OUR OFFERING

Greenply

Greenply BLOCKBOARD

Greenply DOORS

Greenply WPC | PVC | UPVC

Woodcrests™ Veneers from Greenply

VESCOM

Greenply MDF

Greenply samet

GREENPLY ADVANTAGE:

Brand Legacy

30+ Years
Of leadership and trust

Wide range of products to cater consumer needs

Plywood | MDF | Veneers | Doors | PVC

Industry first Innovations

- 4 Press Technology
- Zero Emission E-0
- Structural Grade
- Penta (5) Technology
- Okoume Face

Progressing sustainably

By practicing suitability as a core of doing business

64 Mn - Saplings Planted Till **July 2025**

100 Mn - Sapling plantation Commitment Till **2028**

Global & Domestic Certifications

- California Air Resources Board Regulations
- Environmental Protection Agency
- European Conformity
- Green Rating For Integrated Habitat Assessment
- Indian Green Building Council

PLYWOOD & BLOCKBOARD

Greenply CLUB 700

Greenply CLUB 500

Greenply PLATINUM

Greenply GOLD

Greenply MARINE 710

Greenply MR 303

Greenply CLUB FLEXIPLY

Greenply FLEXIPLY

Greenply ABSOLUTE BWP

Greenply ABSOLUTE MR 303

OPTIMA® G 710 By Greenply

OPTIMA® G MR By Greenply

ECOTEC® PLATINUM From Greenply

ECOTEC® 710 From Greenply

ECOTEC® MR 303 From Greenply

ECOTEC® BWR From Greenply

ECOTEC® TMR From Greenply

THE PLYWOOD THAT SPELLS PURE CLASS

A structural grade plywood designed with pursuit of perfection An epitome of durability and performance Exquisitely crafted to meet aesthetic & functional needs Setting unbeatable benchmarks of performance and style

SCAN THIS CODE TO EXPERIENCE THE CLASS OF GREENPLY CLUB

WHAT DOES A CLUB MEAN ?

C = CARE

L = LUXURY

U = ULTIMATE STRENGTH

B = BEST IN CLASS FEATURES



A PLYWOOD CAN'T BE CALLED AS CLUB UNLESS IT COMPARES ON THE ABOVE FEATURES

Greenply

CLUB 700

A EPITOME OF LUXURY & STRENGTH

Green Club 700 is the epitome of durability, quality and performance. Exclusively crafted to meet the aesthetic and functional needs, it brings out sophistication in the most nuanced way.

- **Wood Like Strength:** Density & strength closer to the wood
- **Structural Grade:** Certified as per **IS 10701** Structural Timber Specification as per IS:3629
- **Lifetime Warranty:** Lifetime Warranty against manufacturing
- **Acoustically Effective:** Enahnced Noise/Sound control for quieter interiors
- **Borer - Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **7x Money Back**: Promise of 7X money back warranty
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **CARB Certified:** Global certification for Zero Emission plywood by California Air Resources Board
- **17 Layers* :** that adds to the durability and strength
- **2X Fire Retardant:** Delaying spread of fire up to 90 minutes
- **Virashield:** Anti-Viral and Anti -Bacterial
- **2x Waterproof:** Water resistance up to 144 hours
- **Penta 5 technology :** Advanced Penta 5 technology for strength & precision

Technical specifications

PARTICULARS	OBSERVED VALUES
Moisture content	5% to 20%
Density	820 Kgs/m³
Formaldehyde Emission Level	E-0 Level
Fire Retardant Properties	Delays Fire by 90 mins#
Water Resistance Test	After 144 hrs
Adhesion of Plies	Excellent
Screw Holding Capacity	280 Kgs
Nail Holding Capacity	Upto 100 Kgs

PARTICULARS	OBSERVED VALUES
Tensile Strength:	
a) Along the grain	67 N/mm²
b) Across the grain	46 N/mm²
Static Bending Strength:	
a) Modulus of Rupture	
i) Along the grain	65.10 N/mm²
ii) Across the grain	45.50 N/mm²
b) Modulus of Elasticity	
i) Along the grain	8250 N/mm²
ii) Across the grain	5215 N/mm²

#Values shown are basis standard lab test results.

*Available in select thickness

Greenply

Greenply CLUB 500

ULTIMATE STRENGTH FOR SUPERIOR STRUCTURES

Make your furniture strong, durable with the Club 500 ply. Give your home and enduring touch of protection and strength with Greenply Club 500- a flagship product from the house of Greenply.

- **Structural Grade:** Certified as per IS 10701 Structural Timber Specification as per IS:3629
- High Durability and strength
- **Lifetime Warranty:** Lifetime Warranty against manufacturing defects
- **Fire Safe:** Limits Spread of Fire And Emits Less Smoke
- **5x Money Back:** : Promise of 5X money back warranty
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **CARB Certified:** Global certification for Zero Emission plywood by California Air Resources Board
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **Penta 5 technology :**Advanced Penta 5 technology for strength & precision
- **BWP Grade:** Withstands Boiling Water Test
- **Virashield:** Anti-Viral and Anti-Bacterial

Technical specifications

PARTICULARS	OBSERVED VALUES
Moisture content	5% to 15%
Density	770 Kgs/m³
Formaldehyde Emission Level	E-0 Level
Water Resistance Test	108 hrs
Adhesion of Plies	Excellent
Screw Holding Capacity	230 Kgs
Nail Holding Capacity	170 Kgs
Panel Shear Strength	12.6 N/mm²
Flame Penetration	Up to 50 mins

PARTICULARS	OBSERVED VALUES
Tensile Strength:	
a) Along the grain	60 N/mm²
b) Across the grain	38 N/mm²
Static Bending Strength:	
a) Modulus of Rupture	
i) Along the grain	58.70 N/mm²
ii) Across the grain	38.60 N/mm²
b) Modulus of Elasticity	
i) Along the grain	7750 N/mm²
ii) Across the grain	4650 N/mm²
Compressive Strength:	
a) Along the grain	36 N/mm²
b) Across the grain	31 N/mm²

#Values shown are basis standard lab test results.

Greenply

Greenply PLATINUM

2X SUPERIOR PLYWOOD

Bring the science of plywood home. PEN Technology (Phosphate Enriched Nanoparticle) makes plywood two times more fire resistant. It is twice as boiling waterproof as standard FR grade plywood since it is enriched with un-extended BWP resin.

- **2x Fire Retardant:** Protective mesh that delays fire up to 90 minutes
- **2x Waterproof:** Water resistance up to 144 hours
- **2x Money Back:** Promise of 2X money back warranty
- **Warranty:** Best in class 30 Years Warranty against manufacturing defects
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **CARB Certified:** Global certification for E-Zero plywood by California Air Resources Board
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 12120)
- **Virashield:** Anti-Viral and Anti-Bacterial
- **4 Press Technology:** Advanced 4 Press Technology to ensure utmost precision
- **Calibrated:** Top-notch Calibration that gives uniform thickness & super-smooth surface
- **IS 5509:** Fire retardant certification

Technical specifications

PARTICULARS	OBSERVED VALUES
Moisture Content	5%-20%
Density	750 Kgs/m³
Formaldehyde Emission Level	E-0 level
Fire-Retardant Properties	Fully Fire-Retardant
Flammability Test	>45 Minutes
Flame Penetration Test	>90 Minutes
Rate of Burning Test	>20 Minutes
Water Resistance Test	144 Hours
Glue Shear Strength Test: (a) Dry State (b) Wet State (After 72 Hours Boiling) Rolling Shear Strength	Min.-1280 (N) Avg.-1490 (N) Min.-1180 (N) Avg.-1290 (N)

PARTICULARS	OBSERVED VALUES
Tensile Strength	62 N/mm² 41 N/mm²
Static Bending Strength: (e)Modulus of Rupture 5.Along the grain 6.Across the grain (f)Modulus of Elasticity 5.Along the grain 6.Across the grain	 61.90 N/mm² 57.50 N/mm² 7950 N/mm² 4890 N/mm²
Screw Holding Capacity	250 Kgs
Nail Holding Capacity	175 Kgs

#Values shown are basis standard lab test results.

Greenply

Greenply GOLD

SONE JAISA KHARA :

All New GOLD 2.0 is engineered using 100% composed core and panels, seamlessly stitched with hot melt glue, offering superior waterproof and fire-safe features.

- **Ultimate Waterproof:** Withstands 72 hours of BWP Test
- **Warranty:** Best In Class 30 Years Warranty against manufacturing defects
- **The 4 Press Technology:** Advanced 4 Press Technology to ensure utmost precision
- **Fire Safe:** Ability to resist flames up to 48 mins
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **Calibrated:** Top-notch calibration for uniform thickness & smooth surface
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **Virashield:** Anti-Viral & Anti-Bacterial
- **IS :710 certified**
- **CARB Certified:** Global certification for E-Zero plywood by California Air ResourcesBoard
- **Made with BWP Grade Resole Resin To Make It Boiling Waterproof**
- **Unextended BWP Resin**

Technical specifications

PARTICULARS	OBSERVED VALUES
Moisture Content	5%-15%
Density	730 Kgs/m³
Formaldehyde Emission Level	E-0 Level
Glue Shear Strength Test: (a) Dry State (b) Wet State (After 72 Hours Boiling)	 Avg.-1450 (N) Min.-1250 (N) Avg.-1300 (N)
Mycological Test	Min.-1200 (N) Avg.-1250 (N)
Tensile Strength:	54 N/mm² 35 N/mm²
Flame Penetration	up to 48 mins

PARTICULARS	OBSERVED VALUES
Static Bending Strength: a) Modulus of Rupture i) Along the grain ii) Across the grain b) Modulus of Elasticity i) Along the grain ii) Across the grain	 54.70 N/mm² 35.20 N/mm² 7590 N/mm² 4580 N/mm²
Screw Holding Capacity	195 Kgs
Nail Holding Capacity	110 Kgs
Retention of Preservative Chemicals (Kg/m³)	12 Kg/m³

Greenply

MARINE 710

ULTIMATE WATERPROOF PLY:

Made with BWP Grade Resole Resin, Greenply Marine 710 plywood stands strong against extreme water conditions and is ideal for internal applications such as kitchens, bathrooms, cabinets, etc.

- **Ultimate Waterproof:** Withstands 72 hours of BWP Test
- **Warranty:** Best In Class 25 Years Warranty against manufacturing defects
- **The 4 Press Technology:** Advanced 4 Press Technology to ensure utmost precision
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **Calibrated:** Top-notch calibration for uniform thickness & smooth surface
- **CARB Certified:** Global certification for E-Zero plywood by California Air Resources Board
- **Virashield:** Anti-Viral & Anti-Bacterial
- **IS :710 certified**

Technical specifications

PARTICULARS	OBSERVED VALUES
Moisture Content	5%-15%
Density	730 Kgs/m³
Glue Shear Strength Test: (a) Dry State	Min.-1250 (N) Avg.-1450 (N)
(b) Wet State (After 72 Hours Boiling)	Min.-1120 (N) Avg.-1250 (N)
Mycological Test	Min.-1010 (N) Avg.-1210 (N)
Tensile Strength:	54 N/mm² 35 N/mm²

PARTICULARS	OBSERVED VALUES
Static Bending Strength: a) Modulus of Rupture i) Along the grain ii) Across the grain b) Modulus of Elasticity i) Along the grain ii) Across the grain	 54.70 N/mm² 35.20 N/mm² 7590 N/mm² 4580 N/mm²
Screw Holding Capacity	195 Kgs
Nail Holding Capacity	110 Kgs
Retention of Preservative Chemicals (Kg/m³)	12 Kg/m³

#Values shown are basis standard lab test results.

Greenply

MR 303

FOR ULTIMATE MOISTURE DEFENSE

Greenply MR 303 plywood has the ability to even withstand the extreme moisture condition, thereby adding an edge to the concept of durability.

Moisture Resistant: MR grade Plywood to withstand extreme humid conditions

Calibrated: Top-notch calibration for uniform thickness & smooth surface

Warranty: 9 Years Warranty against manufacturing defects

CE: Conforms to European Standards

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 5539)

IS : 303 certification

The 4 Press Technology: Advanced 4 Press Technology to ensure utmost precision

Emission Safe: Healthy Interiors safe from harmful formaldehyde emission

IGBC certified: IGBC certified to meet eco-friendly and sustainable building standards

PARTICULARS	OBSERVED VALUES
Moisture Content	5%-15%
Density	710 Kgs/m³
Glue Sheare Strength: a) Dry State	Min.-1190 (N) Avg.-1280 (N)
b) Wet State	Min.-1010 (N) Avg.-1190 (N)
Mycological Test	Min.-910 (N) Avg.-1090 (N)

PARTICULARS	OBSERVED VALUES
Static Bending Strength: a) Modulus of Rupture	
i) Along the grain	44.10 N/mm²
ii) Across the grain	40.20 N/mm²
b) Modulus of Elasticity	
i) Along the grain	5290 N/mm²
ii) Across the grain	4610 N/mm²
Screw Holding Capacity	175 Kgs
Nail Holding Capacity	100 Kgs

#Values shown are basis standard lab test results.

Greenply

CLUB FLEXIPLY

REDEFINE LIVING SPACES BY ADDING CURVES TO IT.

Greenply Club Flexiply plywood is curated for the curved surfaces of your home. The high bending property, is apt for all the curved surfaces of your home where normal plywood might not work.

High Bending Property: Flexible & durable to take any shape

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 5539)

Zero Emission: Zero formaldehyde emission for healthy interiors

Virashield: Anti-Viral and Anti-Bacterial

CARB Certified: Global certification for E-Zero plywood by California Air Resources Board


Size

2440mm X 1220mm

Thickness

6mm | 8mm | 12mm

Bending Radii

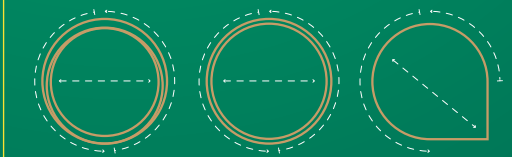

10X4 EXTRA LARGE SHEETS

Our strength in developing products with strong insights has kept us forefront of delivering the consumer centric products and solutions. 10ft x 4ft plywood is yet another similar break through product that will help customers innovate and experiment with designs.

Advantages of **10x4 Extra Large Sheets :**

- Joint-free large furniture
- 10x4 Veneer Pasting's
- No compromise on furniture strength & durability
- Cost efficiency to influencer
- Minimize wastage in custom size
- Handling Cost efficiency

AVAILABLE PRODUCT RANGE :

Greenply CLUB 500

Greenply PLATINUM

Greenply GOLD

Greenply MARINE 710

Greenply

Greenply ABSOLUTE

PREFERRED CHOICE FOR OEMs

CALIBRATED for Uniform Thickness And Utmost Precision

BWP

Made with BWP Grade Resole Resin To Make It Boiling Waterproof

TERMITE & BORER PROOF

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 5539)

GREEN ASSURE E-0

Zero Emission: Zero formaldehyde emission for healthy interiors

AVAILABLE IN :

Greenply ABSOLUTE BWP

Greenply ABSOLUTE MR 303

*Available only on Absolute BWP

OPTIMA® G 710

By Greenply

WATERPROOF PERFORMANCE GUARANTEED

Optima G 710 plywood stands out as a performance-guaranteed solution against the threats posed by water, showcasing exceptional quality and reliability across diverse and challenging environments.

- **Water-Proof:** BWP Grade Resole Resin protection
- **IS: 303 Certified**
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **Warranty:** Best in class 21 Years Warranty against manufacturing defects
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **CARB Certified:** Global certification for Zero Emission plywood by California Air Resources Board
- **The 4 Press Technology:** Advanced 4 Press Technology to ensure utmost precision
- **Calibrated:** Uniform thickness and utmost precision
- **Virashield:** Anti-Viral and Anti-Bacterial

Technical specifications

PARTICULARS	OBSERVED VALUES
Density	710 Kgs/m³
Formaldehyde Emission Level	E-0 Level
Water Resistance Test	After 72 hours
Thickness	Max: 18.50 mm
Glue Shear Strength: (a) Dry State (b) Wet State (After 72 hrs. boiling)	 Avg.-1470 (N) Avg.-1180 (N)
Tensile Strength: (a) Along the grain (b) Across the grain	 52 N/mm² 36N/mm²

PARTICULARS	OBSERVED VALUES
Static Bending Strength: (a) Modulus of Rupture (i) Along the grain (i) Across the grain (b) Modulus of Elasticity (i) Along the grain (i) Across the grain	 50.70 N/mm² 39.60 N/mm² 7550 N/mm² 4450 N/mm²
Moisture Content	9%
Screw Holding Capacity	180 Kgs

#Values shown are basis standard lab test results.

OPTIMA® G MR

By Greenply

MOISTURE PROOF PERFORMANCE GUARANTEED

Optima G MR grade plywood is a top-notch choice, when it comes to high-quality commercial plywood, topping expectations with its outstanding performance.

Moisture Resistant: MR Grade Plywood to withstand humid conditions

The 4 Press Technology: Advanced 4 Press Technology to ensure utmost precision

IS: 303 Certified

Calibrated: Uniform thickness and utmost precision

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 5539)

Emission Safe: Healthy Interiors safe from harmful formaldehyde emission

Warranty: 7 years warranty against manufacturing defects

IGBC certified: IGBC certified to meet eco-friendly and sustainable building standards

Technical specifications

PARTICULARS	OBSERVED VALUES
Density	700 Kgs/m³
Thickness Tolerance	Avg. 18.00 mm
Glue Shear Strength: (a) Dry State (b) Wet State	 Avg.-1110 (N) Avg.-1000 (N)
Adhesion of Plies	Excellent
Moisture Content	9%
Screw Holding Capacity	150 Kgs

PARTICULARS	OBSERVED VALUES
Static Bending Strength: (a) Modulus of Rupture (i) Along the grain (i) Across the grain (b) Modulus of Elasticity (i) Along the grain (i) Across the grain	 39 N/mm² 35 N/mm² 4900 N/mm² 3600 N/mm²

#Values shown are basis standard lab test results.

Greenply

ECOTEC® PLATINUM

From Greenply

LOW FORMALDEHYDE EMISSION PLYWOOD

Transform your home into an eco-conscious space with low-emission solutions. Every Ecotec plywood sheet goes through stringent 10 point quality checks at multiple points from factory to warehouse making it a testimony of Kaam Sahi, Daam Sahi.

- **IS: 303 Certified**
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **Emission Safe:** Healthy Interiors safe from harmful formaldehyde emission
- **Calibrated:** Uniform thickness and utmost precision
- **BWP Grade Resole Resin:** Boiling Water Proof with unextended BWP Resin
- **ViraShield:** Anti-Viral and Anti-Bacterial
- **Warranty:** Best In Class 15 Years Warranty against manufacturing defects
- **100% Composed Core:** To ensure strength with durability.

Technical specifications

PARTICULARS	OBSERVED VALUES
Formaldehyde Emission Level	Low Emission
Water Resistance Test	After 72 hours Excellent
Thickness Tolerance	Max: 18.50 mm Min: 18.20 mm Avg. 18.40 mm
Glue Sheare Strength: a) Dry State	Min.-1240 (N) Avg.-1470 (N)
b) Wet State (After 72 hrs. boiling)	Min.-1050 (N) Avg.-1180 (N)
Adhesion of Plies	Excellent
Moisture Content	10%

PARTICULARS	OBSERVED VALUES
Tensile Strength:	
a) Along the grain	53 N/mm²
b) Across the grain	34N/mm²
Static Bending Strength:	
a) Modulus of Rupture	
i) Along the grain	52.10 N/mm²
ii) Across the grain	45.50 N/mm²
b) Modulus of Elasticity	
i) Along the grain	7580 N/mm²
ii) Across the grain	4460 N/mm²
Screw Holding Capacity	200 Kgs

#Values shown are basis standard lab test results.

ECOTEC® 710
From Greenply

AFFORDABLE WATERPROOF PLYWOOD

Quality protection at an affordable price. Every Ecotec plywood sheet goes through stringent 10 point quality checks at multiple points from factory to warehouse making it a testimony of Kaam Sahi, Daam Sahi.

- **IS: 303 Certified**
- **Water-Proof:** BWP Grade Resole Resin protection
- **Warranty:** 10 years warranty against manufacturing defects
- **BWP Grade Resole Resin:** Boiling Water Proof with unextended BWP Resin
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 5539)
- **Emission Safe:** Healthy Interiors safe from harmful formaldehyde emission

Technical specifications

PARTICULARS	OBSERVED VALUES
Density	690 Kgs/m³
Formaldehyde Emission Level	Low Emission
Water Resistance Test	After 72 hours Excellent
Maximum Thickness Tolerance	Max: 18.40 mm
Glue Sheare Strength:	
a) Dry State	Min.-1230 (N) Avg.-1420 (N)
b) Wet State (After 72 hrs. boiling)	Min.-1020 (N) Avg.-1090 (N)
Adhesion of Plies	Excellent
Screw Holding Capacity	180 Kgs

PARTICULARS	OBSERVED VALUES
Tensile Strength:	
a) Along the grain	50 N/mm²
b) Across the grain	31 N/mm²
Static Bending Strength:	
a) Modulus of Rupture	
i) Along the grain	53.30 N/mm²
ii) Across the grain	40.20 N/mm²
b) Modulus of Elasticity	
i) Along the grain	7510 N/mm²
ii) Across the grain	4340 N/mm²
Moisture Content	10%

#Values shown are basis standard lab test results.

ECOTEC® MR 303

From Greenply

ULTIMATE MOISTURE RESISTANT PLYWOOD

Maximum moisture resistance embodied in our ultimate plywood. Every Ecotec plywood sheet goes through stringent 10 point quality checks at multiple points from factory to warehouse making it a testimony of Kaam Sahi, Daam Sahi.

Moisture Resistant: MR Grade Plywood to withstand humid conditions

Borer Proof: (Preservative Treated as per IS 5539)

IS : 303 Certified MR Grade Plywood

Warranty: 5 years warranty against manufacturing defects

Technical specifications

PARTICULARS	OBSERVED VALUES
Density	570 Kgs/m³
Formaldehyde Emission Level	Low Emission
Thickness Tolerance	Max. 18.35 mm Min: 17.35 mm Avg. 17.55 mm
Adhesion of Plies	Excellent
Moisture Content	8%
Screw Holding Capacity	180 Kgs

PARTICULARS	OBSERVED VALUES
Tensile Strength:	
a) Along the grain	44 N/mm²
b) Across the grain	26.5 N/mm²
Static Bending Strength:	
a) Modulus of Rupture	
i) Along the grain	51 N/mm²
ii) Across the grain	31 N/mm²
b) Modulus of Elasticity	
i) Along the grain	7570 N/mm²
ii) Across the grain	4250 N/mm²

#Values shown are basis standard lab test results.

ENGINEERED FOR EVERY PROJECT NEED

From moisture resistance to unmatched durability, Ecotec PRO is built for all types of projects — ensuring lasting quality in every detail.

ECOTEC® PRO MR

- **Moisture Resistant:** MR Grade Plywood to withstand humid conditions
- **PRE PRESSED**
- **SELECTED HARDWOOD SPECIES**
- **IS : 303 certification**
- **Borer Proof:** (Preservative Treated as per IS 5539)

ECOTEC® PRO 710

- **Emission Safe:** Healthy Interiors safe from harmful formaldehyde emission
- **PRE PRESSED**
- **SELECTED HARDWOOD SPECIES**
- **IS : 303 certification**
- **Borer Proof & Termite Resistant:** (Preservative Treated as per IS 5539)
- **IGBC certified:** IGBC certified to meet eco-friendly and sustainable building standards

DOORS

ENDURING TRUST & PEACE OF MIND First knock on a door is considered as first impression. And like every corner of the house, it demands equal attention.

Greenply doors is a perfect blend of durability and tranquility. Build to stand the test of time and provide a haven of security and serenity.

Our range zero emission, waterproof and weatherproof doors are not just a part of interior space; they're a commitment to comfort and peace of mind.

Greenply DOORS CLUB

Greenply DOORS PLATINUM

Greenply DOORS GOLD

Greenply DOORS

OPTIMA G DOORS By Greenply

ECOTEC DOORS PLATINUM From Greenply

ECOTEC DOORS From Greenply

Greenply

Greenply DOORS CLUB

FORTIFYING LIVING SPACES

- **Emission Safe:** Healthy Interiors safe from harmful formaldehyde emission
- **Lifetime Warranty:** Lifetime Warranty against manufacturing defects
- **100% Pine Wood Frame & Filler**
- **3X Money Back:** Promise of 3X money back warranty
- **Weatherproof:** Withstand all weather changes
- **IS :2202 Certification**
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 401)
- **FIRE SAFE**

Greenply

Greenply DOORS PLATINUM

DOORS THAT STAND THE TEST OF TIME

- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 401)
- **100% Pine Wood Frame & Filler**
- **Warranty:** Best In Class 30 years warranty against manufacturing defects
- **Weatherproof:** Withstand all weather changes
- **IS: 2202 certification**
- **FIRE SAFE**

Greenply

Greenply DOORS

GOLD

BOILING WATERPROOF DOORS

- **Weather Resistance:** Resistant to weather changes
- **Warranty:** Best In Class 30 years warranty against manufacturing defects
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 401)
- **IS :2202 Certification**
- **Zero Emission:** Zero formaldehyde emission for healthy interiors
- **FIRE SAFE**

Greenply

Greenply DOORS

BOILING WATERPROOF DOORS

- **Weather Resistance:** Resistant to weather changes
- **BWP Grade:** Boiling Water Proof with unextended BWP Resin
- **Borer- Fungus proof & Anti-Termite Guarantee:** (Preservative Treated as per IS 401)
- **IS :2202 Certification**
- **Emission Safe:** Healthy Interiors safe from harmful formaldehyde emission
- **FIRE SAFE**
- **Warranty:** Best In Class 30 years warranty against manufacturing defects
- **Dimensionally Stable**

Greenply

OPTIMA® G DOORS

By Greenply

AN ENTRANCE MARKED BY ASSURANCE

Weather Resistance: Resistant to weather changes

Warranty: Best In Class 21 years warranty against manufacturing defects

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 401)

IS :2202 Certification

Emission Safe: Healthy Interiors safe from harmful formaldehyde emission

Greenply

ECOTEC® DOORS
PLATINUM
From Greenply

BOILING WATERPROOF DOORS

Weather & Boil Proof

Warranty: Best In Class 15 years warranty against manufacturing defects

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 401)

IS :2202 Certification

Emission Safe: Healthy Interiors safe from harmful formaldehyde emission

ECOTEC® DOORS

From Greenply

Borer- Fungus proof & Anti-Termite Guarantee: (Preservative Treated as per IS 401)

Warranty: Best In Class 07 years warranty against manufacturing defects

IS :2202 Certification

Emission Safe: Healthy Interiors safe from harmful formaldehyde emission

PVC BOARDS & DOORS

PROMISE OF AESTHETICS & DURABILITY

PVC/WPC boards and doors in the Green PVC range are lead-free, making them an environmentally conscious choice for the interiors. Every living space will be made healthy and appealing thanks to its waterproof and fireproof construction.

Greenply
WPC/PVC BOARDS
PREMIUM PLUS

Greenply
WPC/PVC BOARDS
PREMIUM

Greenply
WPC/PVC BOARDS
MARBBELE

Greenply
WPC DOORS/FRAMES
PRIMO

Greenply
uPVC DOORS
COMMANDOO

Greenply
uPVC DOORS
ROKOKO



LEAD-FREE


FIRE RETARDANT


WATER-PROOF

Greenply

WPC/PVC BOARDS

PREMIUM PLUS

ENDURES LIKE WOOD, LASTS FOR LIFE

- Superior Density 0.62 g/cm^3 for extra strength
- Lead Free PVC Boards for healthier environment
- Limits spread of fire and emits less smoke
- Inhibits growth of harmful bacteria & development of fungi
- **Lifetime Warranty:** Lifetime Warranty against manufacturing
- Combination of strength with durability for long lasting performance
- Termite & Borer Proof for longlasting performance
- Ideal for application in high moisture areas
- Minimizing waste and supporting environmental stewardship

Product Specifications

Standard Size:

2440 mm X 1220 mm

PVC/WPC Thickness:

6, 8, 12, 15, 18, 25 mm

Greenply

Greenply

WPC/PVC BOARDS

PREMIUM

WHERE ARTISTRY MEETS PRECISION

- Superior Density 0.55 g/cm³ for extra strength
- Lead Free PVC Boards for healthier environment
- Limits spread of fire and emits less smoke
- Inhibits growth of harmful bacteria & development of fungi
- **Warranty:** Best in class 20 Years Warranty against manufacturing defects
- Combination of strength with durability for long lasting performance
- Termite & Borer Proof for longlasting performance
- Ideal for application in high moisture areas
- Minimizing waste and supporting environmental stewardship

Product Specifications

Standard Size:

2440 mm X 1220 mm

PVC/WPC Thickness:

6, 8, 12, 15, 17, 18, 25 mm

Greenply

Greenply

WPC/PVC BOARDS

MARBBELE

VALUE FOR MONEY ALTERNATIVE TO HARDWOOD

- Superior Density 0.47 g/cm^3 for extra strength
- Combination of strength with durability for long lasting performance
- Limits spread of fire and emits less smoke (FIRE RETARDANT)
- Termite & Borer Proof for longlasting performance (TERMITE & BORER PROOF)
- Inhibits growth of harmful bacteria & development of fungi (ANTI-BACTERIAL & ANTI-FUNGAL)
- Ideal for application in high moisture areas (WATERPROOF)

Product Specifications

Standard Size:

2440 mm X 1220 mm

PVC/WPC Thickness:

6, 8, 12, 15, 17 mm

Greenply

Greenply

WPC DOORS/FRAMES

PRIMO

CRAFTED FOR STRENGTH, DESIGN FOR SAFETY

- 100% water & moisture proof
- 100% termite & borer proof
- Tough & sturdy
- 100% Lead free
- Limits spread of fire and emits less smoke
- High screw holding capacity
- Suitable for paint, laminate or veneer application
- Warranty: 25 Years
- No shrinking or swelling
- Easy to maintain
- Ready to use

Product Specifications (Doors)

Standard Size:

3 x 2, 4 x 2.5, 5 x 2.5 inches

WPC Thickness:

25, 26, 28, 30, 32, 35 mm

Product Specifications (Frames)

Standard Size:

2.5 X 2, 3 X 2, 4 X 2.5, 4 X 3,5 X 2.5, 6 X 2.5 inches

Greenply

uPVC DOORS

ROKOKO

FOR ELEGANT & STYLIST INTERIORS



Limits spread of fire and emits less smoke



Ease of cleaning and maintenance free



Ideal for application in high moisture areas



Variety to designs to choose from



Treated with special chemical to protect against natural decay



Eco-friendly product, helps reduce impact on Environment



Termite & Borer Proof for longlasting performance

CROSS-SECTIONAL DIMENSIONS (IN MM)	50 X 60
STANDARD LENGTH (IN Feets)	5

Greenply

uPVC DOORS

COMMANDOO

FOR COMPLETE STABILITY & VERSATILITY

- Strengthened with polymeric reinforcement to avoid weathering
- Resistance to weathering elements, including sunlight, rain, cold, and extreme temperatures
- Requires No Maintenance
- Termite & Borer Proof for longlasting performance
- Designed for stability & versatility
- Cost Effective

CROSS-SECTIONAL DIMENSIONS (IN MM)	40 X 48
STANDARD LENGTH (IN FEETS)	5

GREENPLY VENEERS

Decorative veneers from Greenply is an amalgamation of style and substance. Driven by art, chiselled by science and inspired by natures, decorative veneers from Greenply are just like masterpiece of an art that can elevate any space to a whole new level of luxury.

Wood Crests™ Veneers from Greenply

Burma Teak Veneers from Greenply

Royal Crown Veneers from Greenply

Kohl Forest Veneers from Greenply

ENGINEERED VENEERS From Greenply

Greenply

Woodcrrests™

Veneers from Greenply

EXQUISITELY CRAFTED

Elevate your spaces to unparalleled heights of elegance, and immerse yourself in a world where beauty knows no bounds. Made from the finest timber source from exotic forests of Europe, bearing natural grains and pattern, Woodcrrests veneers from Greenply are crafted exquisitely to deliver ultimate luxury. It gives your home something that is beyond justa décor.

DECO REAL (NATURALS)

FUMED NOUVEAU (ROASTED)

STERLING SOLITAIRE (EXCLUSIVE)

THE WOODCRRESTS VENEER DIFFERENCE

- EMISSION LEVEL E-0 — Zero Emission Veneers for Safer Interiors
- 1100+ DESIGNS — Sourced from the exotic forests of Canada, Brazil, Argentina, Italy, Germany & Africa
- Pre-pressed technology for better stability
- Automated finishing process for identical surface output across the sheet
- BWP GRADE — BWP Grade base ply

Burma Teak

Veneers from Greenply

BRINGING OUT THE BEST IN SPACES

A symbol of elegance & luxury, these natural veneers are made of 100% Burma Teak are available in horizontal/vertical grain as well as One-Sided Teak (OST) and Both-Sided Teak (BST) grades.

- 100% Burma Teak — Giving unconventional look to the furniture and panels
- LOW EMISSION — Negligible emissionto ensure safe interiors
- TERMITE & BORER PROOF — Borer & Termite Resistance for long- lasting performance
- Individual Veneers treated with specialty preservatives before assembly
- IS:1328 — Confirms to BWP grade as per IS:1328 (1996)
- Eco-friendly with negligible emissions

Royal Crown

Veneers from Greenply

THE CROWNING GLORY OF GRACEFUL LIVING

Royal Crown veneers are crafted with meticulousness to suit every interior, Sourced from the most luscious teak forests in the world. These crowns cut veneers are a perfect amalgamation of nature's best gift, advanced with the most cutting-edge process.

- Made from pure exotic teak wood, crown-cut to give each piece a magnificent look
- Negligible emissionto ensure safe interiors
- Borer Proof & Termite Resistant
- Individual Veneers treated with specialty preservatives before assembly
- Confirms to BWP grade as per IS:1328 (1996)
- Exotic Teak Wood

Greenply

Kohl Forest

Veneers from Greenply

A ROYAL SHADE INSIDE

Kohl Forest offers an exotic dark species of natural veneers, further roasted to give a unique, rich shade of elegance to your interior spaces. A unique process is perfected to bring rich shades of veneers which feel vogue.

- For stunning interior appeal
- Negligible emissionto ensure safe interiors
- Borer Proof & Termite Resistant
- Individual Veneers treated with specialty preservatives before assembly
- Confirms to BWP grade as per IS:1328 (1996)
- Exotic Grain Design

ENGINEERED VENEERS

From Greenply

FOR AN EXOTIC DESIGN EXPRESSION

Every home is a unique canvas, every wall is a mute storyteller. At Greenply every sheet of veneer tells a unique tale of living exotic luxury. The engineered veneer will help you to express your style by telling your own story. Affordable and eco-friendly it promises an enduring balance between sustainability and posh living.

Marked by superior grade consistency and uniformity of colour this is an excellent alternative to the rare wooden species that are depleting fast. Our high-quality veneers are engineered with finest grade factory in compliance with International quality standards

- Unique designs
- Confirms to BWP grade as per IS:1328 (1996)
- Eco-friendly, helps reduce impact on Environment
- Healthy, Safe and Environment friendly confirming to European standards
- Borer & Termite Resistance for long-lasting performance

FURNISHING

WHERE FORM AND FUNCTION GO HAND IN HAND!

Transform your living space into an oasis of sustainable design with Vescom's range of sustainable wallcoverings, curtains, and upholstery, designed to make your interiors safe and beautiful, exclusively marketed in India by Greenply.

VESCOM

- A+ rated indoor air quality
- Global Certifications - USCG Certified, Full IMO Certified EN standards compliant, Vinyl+ Certified
- 100% recyclable
- Flame retardant and color fastness to light
- Can be customized with any and every print

PRODUCT RANGE :

WALL COVERING | UPHOLSTERY | CURTAIN

Greenply

Greenply

COMPREG

SPECIALITY PLYWOOD

REDUCES LABOR COST & SAVES TIME

Green Compreg range of super strong and highly compressed plywood is used in various construction-specific applications for building structures, materials for rail coach furnishing, automobile body & platforms,materials meant for general engineering, chemical plants,power generation system etc. The range of products under Green Compreg offer the best in quality & performance for each of your requirements.

Features :

- Negligible interiors to ensure safe interiors
- Borer & Termite Resistance for long-lasting performance
- Treated with specialty preservatives for long lasting performance
- Healthy, Safe and Environment friendly confirming to European standards

Greenply

Greenply COMPREG

Ideal application:

Concrete formwork for beams pillars, columns and slab

Site offices and Mezzanine floors Pallets for paving industry

Automobile Industry Bus and truck flooring

Features:



More reuses/repetitions reduces overall cost of construction



Balanced construction provides high static bending strength



High GSM Film enhances surface finish & abrasion resistance



Bigger size availability reduces labor cost, saves time & smooth finish



Dimensionally stable & structurally strong



Plywood
Conforms to **IS: 4990**

Greenply MDF

Greenply MDF, rendered with cutting-edge PROD-IQ NEO TECH uses Artificial Intelligence to analyse the microfibers and deliver each board with utmost precision. Greenply MDF is designed prudently based on the application it offers, Greenply MDF range is available in three grades as follows

- Greenply INTERIOR MDF
- Greenply EXTERIOR MDF
- Greenply PRELAM MDF
- Greenply 710 HDMR HDF
- Greenply CARB P2 MDF
- Greenply BOIL PRO 500



Greenply Industries Limited

Corporate Address -:

Madgul Lounge, 5th & 6th Floor, 23 Chetla Central Road, Chetla, Kolkata - 700027

West Bengal, India

Website: www.greenply.com

Email: marketing.ply@greenply.com

Toll free: 1800-103-4050